



Quality Changes the World



HEAVY DUTY FORKLIFT TRUCKS



SANY MARINE HEAVY INDUSTRY CO., LTD.

SANY Industrial Park, Gaolan Port Economic and Development Zone,
Zhuhai, Guangdong, China

Tel 0756-7266945 Service 4008 87 8318
Fax 0731-84031999-149 Consulting 4008 87 9318
Email sanyport@sany.com.cn

B03S2CHAP1-CP

Materials and specifications are subject to change without notice. Featured machines in photos may include additional equipment.
Copyright 2015 © SANY all rights reserved.

www.sanygroup.com

SANY HEAVY DUTY FORKLIFT TRUCKS

ACHIEVEMENT OF PROFESSIONAL QUALITY

**COMPREHENSIVE
PRODUCT SERIES**
01

SAFE AND RELIABLE
03

HIGH-EFFICIENCY
05

ENERGY-SAVING
07



COMPREHENSIVE PRODUCT SERIES

SANY Heavy-Duty Forklift Truck can not only handle large-tonnage cargo, but also support maintenance, discharge and installation of important equipment. When equipped with special accessories, it can also handle steel, stone, concrete, wood, 20' container, etc. This SANY Port Machinery self-developed Heavy-duty Forklift Truck is reliable and highly efficient with different series of products with hoisting capacity from 10 to 46 tons. Various attachments and masts are provided to meet customers' different requirements.

World class, No. 1 logistics equipment supplier in China

The following configurations are provided for free combination.

Customized manufacturing is also available:

Hoisting capacity: 10t-16t, 18t-25t, 28t-35t, 40t-46t

Mast: Standard whole view mast, Duplex full free lift mast, Triplex full free lift mast

Attachment: Fork, Coil ram, Clamp, Spreader, Truck frame handler, Bucket, PC prefabrication unit attachment



SAFE AND RELIABLE

Joint design of China and Germany, excellent quality

1 Intelligent Anti-Rollover Protection Technology

Adopt SANY intelligent control technology; detect equipment real-time working conditions to realize intelligent anti-rollover protection. It is highly intelligent, ensuring safety and worry free operation.

2 Cargo Fall-off Protection Technology

The technology can automatically control the position of the attachment, preventing cargo fall in emergencies such as sudden brake or making a turn.

3 Automatic Fire Extinguishing Technology

The pipeline network automatic fire extinguisher with strong spray can realize fire alarm, anti-flaming and fire extinction functions. The fireproof performance is steady and reliable.

4 Cab Automatic Lock Technology

While under maintenance, the cab will be turned on one side. With inappropriate operation, accidents would happen. Cab of SANY Heavy-Duty Forklift Truck has the double protection of mechanical and hydraulic anti-rollover protection, effectively preventing accidental rollover.

5 Automatic Braking Technology upon Reversing

Adopting technologies like laser scanning and graphic identification, the machine can precisely detect people or obstacles within the driving route and then brakes automatically to prevent accidents. It is highly intelligent with high safety.


6 Reliable Structure Design

Designed by China and Germany together, the equipment is assured to be highly reliable and endurable by adopting full-digit prototype design system, going through FEA, dynamics simulation analysis, as well as strict endurance and vibration tests.

7 Reliable Power System

Using world famous brand engines like VOLVO and CUMMINS which are reliable in quality and strong in power, combining the advanced power matching and control technology, the equipment is greatly optimized in dynamic performance.

Scientific and appropriate protection for the engine and gearbox will significantly prolong their longevity.

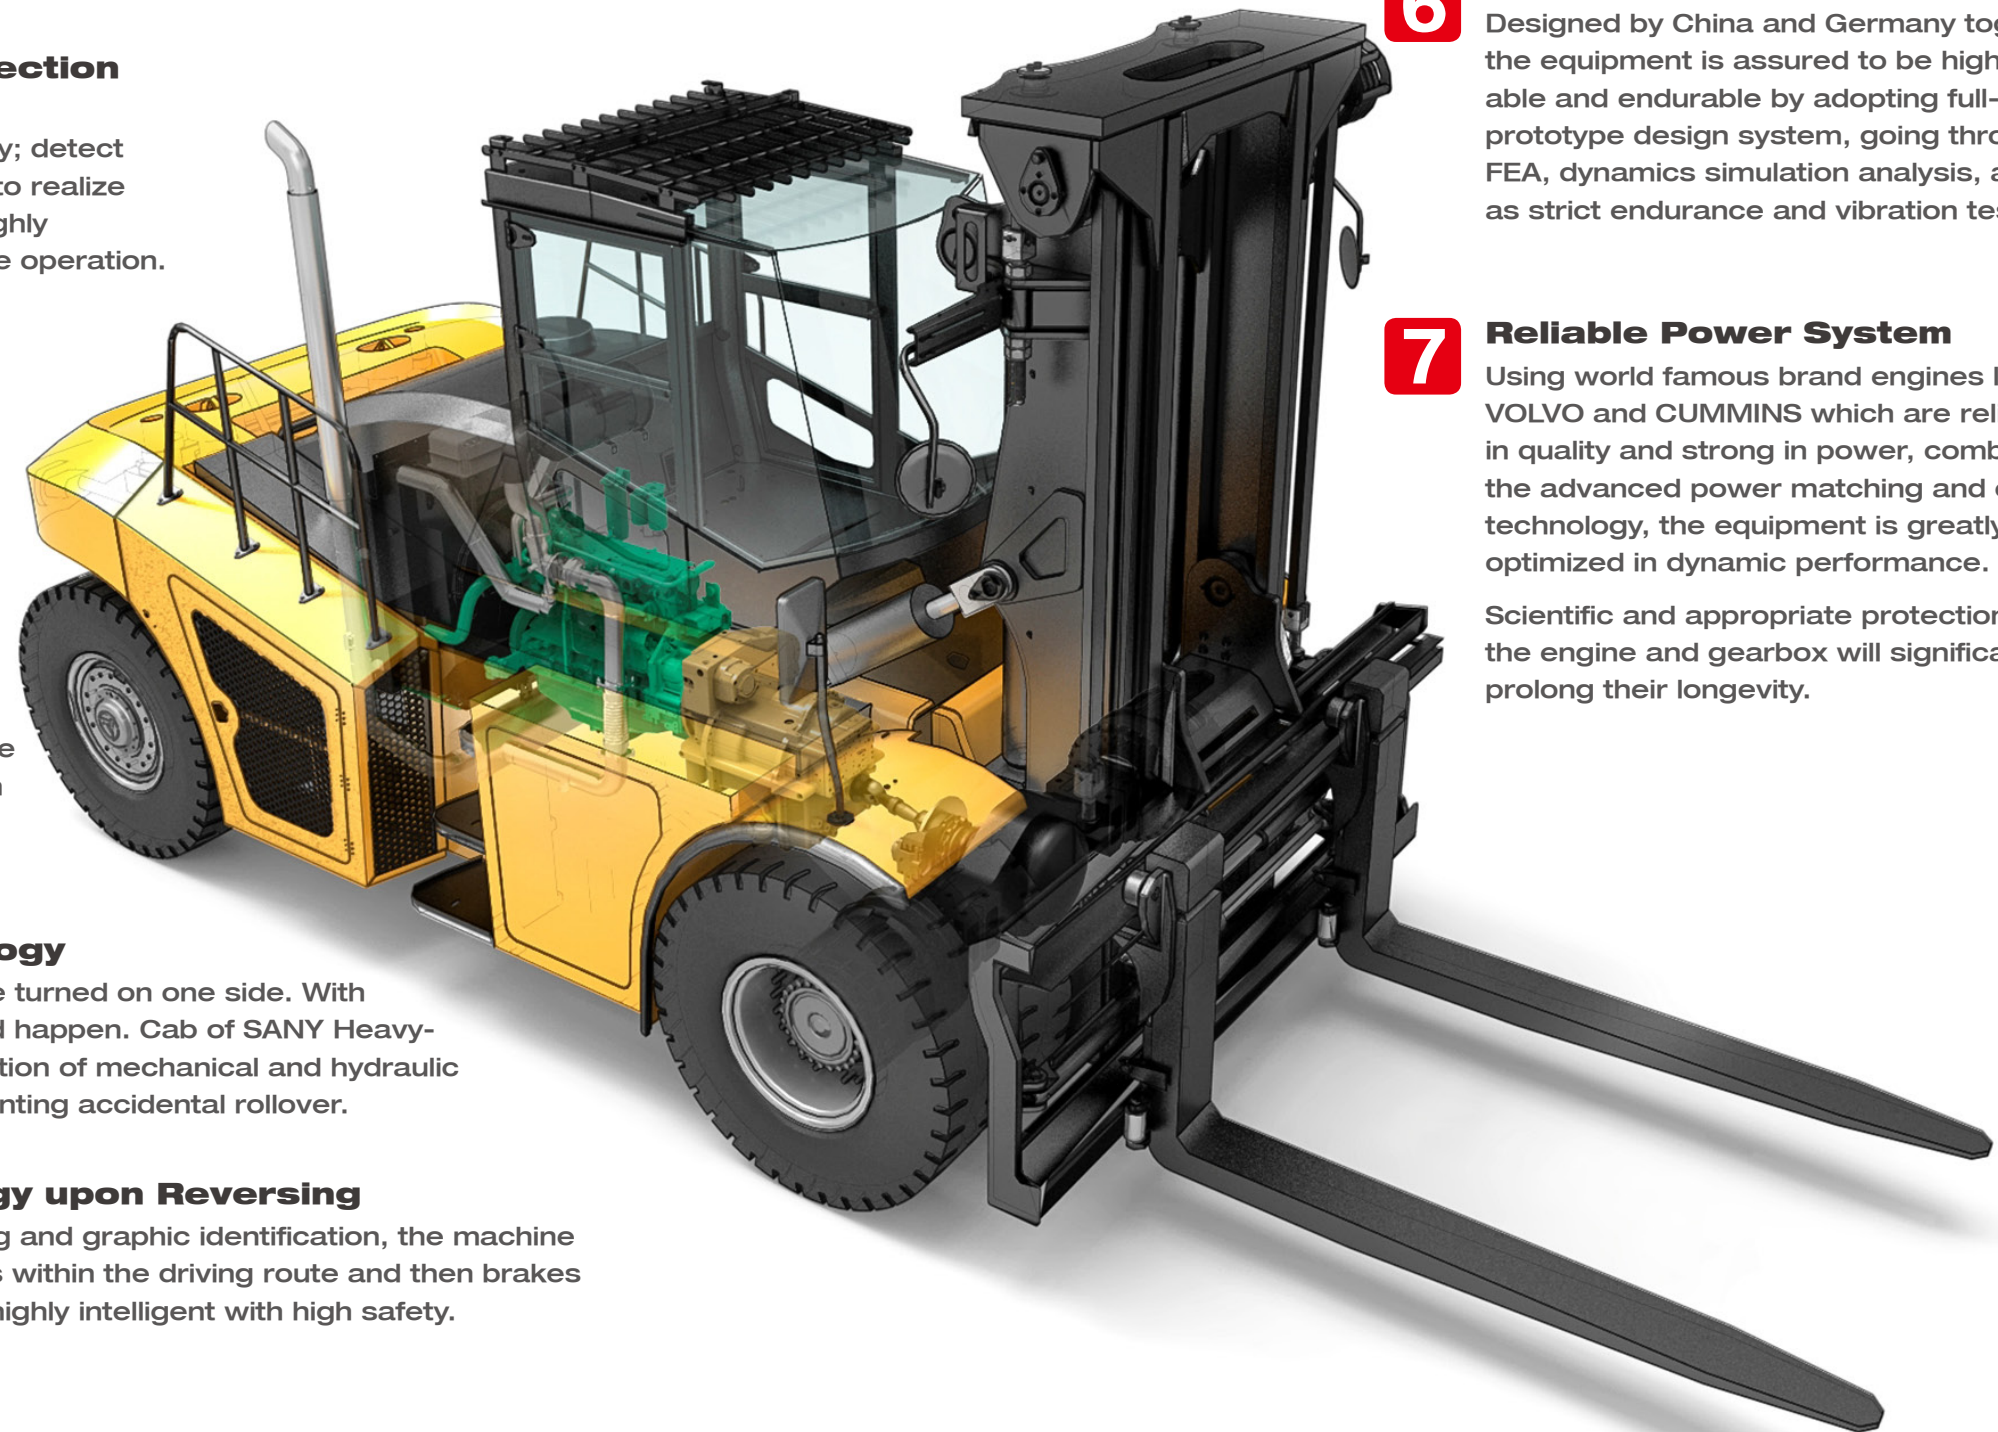

HIGH-EFFICIENCY

**1**

Attachment Quick Change Technology

The attachment can be switched quickly, so as to realize efficient work under different working conditions.

2

Efficient Control Technology

The centralized joystick has inching control function. It can realize fine tuning to millimeter precision easily. All the attachments' motions are under proportional control, providing an experience of man-machine unification. The machine also has multi-motion linkage design so that it can operate faster and more efficiently.

3

Comfortable Operation Environment

The operator-oriented design includes a broad view of working condition. The controlling devices are placed in proper position to ease fatigue of operators.



ENERGY-SAVING

1 Hydraulic Load Sensing System

Automatically adjust the pump displacement according to the load, realizing high precision flow control. The effect of energy saving and consumption reduction are remarkable.

2 Dynamic Power Matching Control System

Automatically recognize dynamic power according to load change and adjust engine speed accordingly. The output power automatically accommodate to load and work conditions, greatly reducing energy consumption.

3 Design for Lighter


Optimize the structure to make it lighter and stronger.




CONFIGURATION PARAMETERS

Parameter		10t	12t~16t			18t~25t			28t~35t			38t~46t	
Engine	Model	CUMMINS	VOLVO	VOLVO	CUMMINS	VOLVO	VOLVO	CUMMINS	VOLVO	VOLVO	CUMMINS	VOLVO	CUMMINS
	Type	QSB 4.5	TAD552VE	TAD572VE	QSB6.7	TAD552VE	TAD572VE	QSB6.7	TAD851VE	TAD871VE	QSC8.3	TAD1150VE	QSM11
	Rated power (kW/rpm)	82/2200	160/2200	160/2300	142/2300	160/2200	160/2300	164/2300	185/2200	185/2200	209/2200	235/2100	250/2300
	Max. torque (Nm/rpm)	488/1500	910/1450	910/1450	929/1500	910/1450	910/1450	949/1500	1160/1350	1160/1200	1356/1500	1581/1260	1674/1400
	Exhaust standard	EU Stage III	EU Stage III	EU Stage IV	EU Stage III	EU Stage III	EU Stage IV	EU Stage III	EU Stage III	EU Stage IV	EU Stage III	EU Stage III	EU Stage III
Gearbox	Type	DANA TE08	DANA 13.7HR32000			DANA 340 TE17312			DANA 340 TE17312			DANA 15.5HR36000	
Drive Axle	Type	DANA 138	KESSLER-D81			18t~20t: KESSLER-D81 22t~25t: KESSLER-D91			KESSLER-D91			KESSLER-D102	
Tyre	Dimension	9.00-20	12.00-24			14.00-24			16.00-25			18.00-25	

HEAVY-DUTY FORKLIFT LOAD CURVE GRAPH

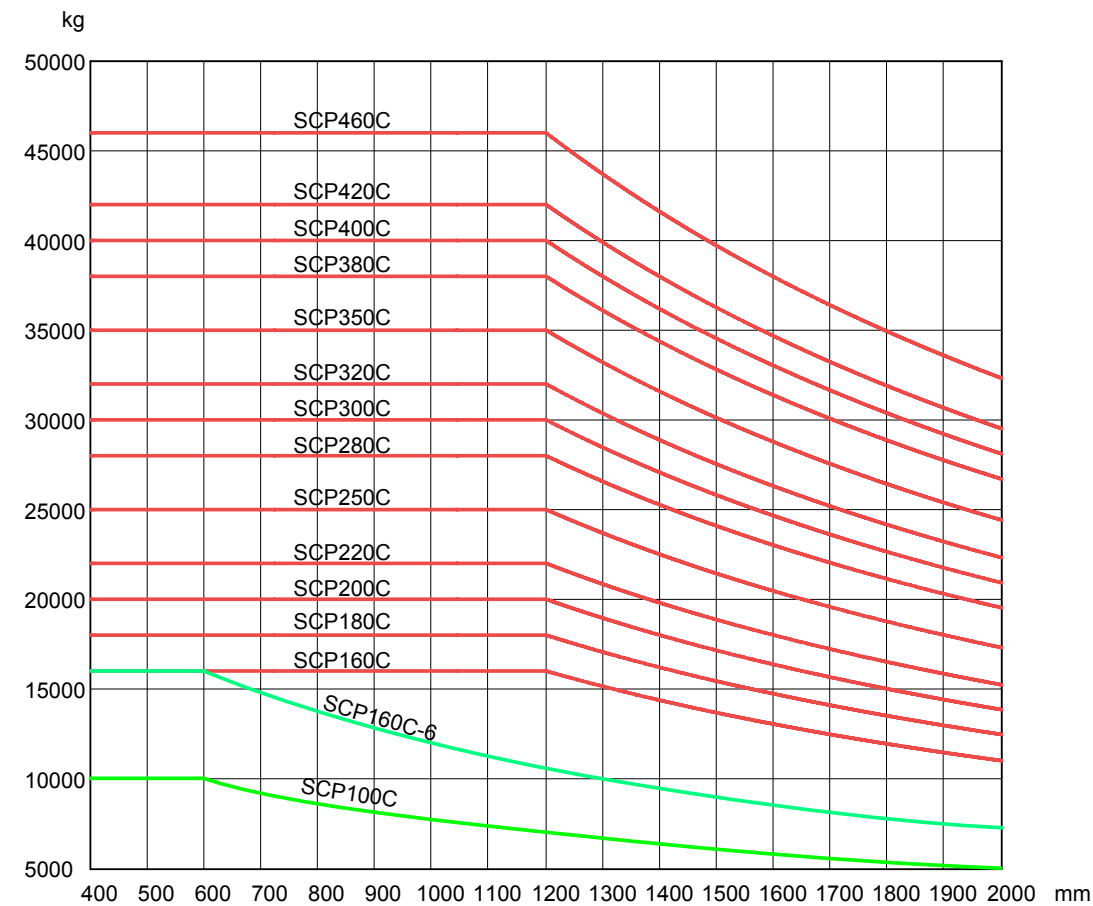

DIMENSION MEASUREMENT IDENTIFIERS

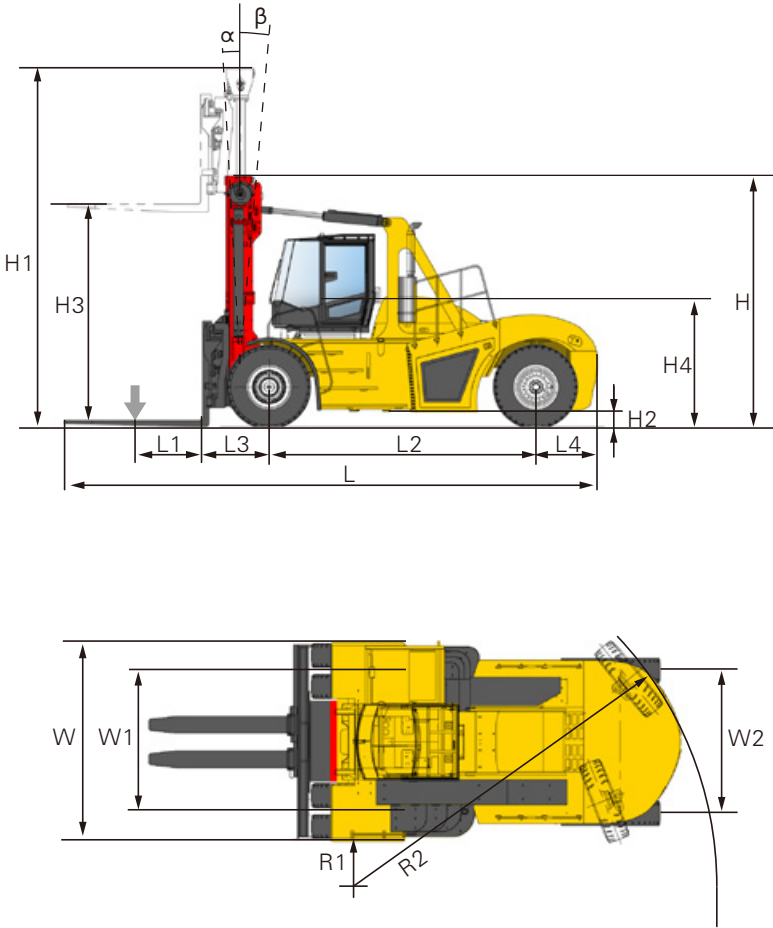

TECHNICAL PARAMETER

Parameter		Unit	SCP100C Series	SCP160C-6 Series	SCP160C-9 Series	SCP160C Series	SCP180C Series	SCP200C Series	SCP220C Series	SCP250C Series
Performance parameters	Rated capacity	t	10	16	16	16	18	20	22	25
	Overall weight	kg	12100	20000	22000	24400	30000	30600	32800	34200
	Max. lift speed (Load/No load)	mm/s	390/410	350/400	350/400	350/400	250/300	250/300	250/300	250/300
	Max. lowering speed (Load/No load)	mm/s	470/340	400/400	400/400	400/400	400/350	400/350	400/350	400/350
	Max. travel speed (Load/No load)	km/h	29/31	28/30	28/30	28/30	26/30	26/30	26/30	26/30
	Gradeability (Load/No load)	%	28/59	27/49	27/49	27/49	22/36	22/36	20/34	18/33
	Cab noise	dB	72	74	74	74	74	74	74	74
Main parameters	Overall length L	mm	5510	6395	7470	8070	8580	8580	8830	8830
	Overall width W	mm	2135	2620	2620	2620	3100	3100	3100	3100
	Overall height H	mm	2850	3660	3760	3760	3950	3950	3950	3950
	Load center L1	mm	600	600	900	1200	1200	1200	1200	1200
	Wheel base L2	mm	2800	3300	3750	3750	4050	4050	4300	4300
	Overhang front L3	mm	710	1010	1010	1010	1125	1125	1125	1125
	Overhang rear L4	mm	750	910	910	910	1005	1005	1005	1005
	Min. ground clearance H2	mm	250	350	350	350	350	350	350	350
	Truck height over seat height H4	mm	1460	1910	1910	1910	2040	2040	2040	2040
	Inner turning radius R1	mm	245	460	460	460	940	940	940	940
	outer turning radius R2	mm	4100	4850	5100	5100	5750	5750	6000	6000
	Front track width W1	mm	1570	1905	1905	1905	2225	2225	2204	2204
	rear track width W2	mm	1700	2120	2120	2120	2450	2450	2450	2450
Mast	Mast height (retracted H / extended H1)	mm	2850/4350	3660/5610	3760/5710	3760/5710	3950/5895	3950/5895	3950/5895	3950/5895
	Max. lift height H3	mm	3000	4000	4000	4000	4000	4000	4000	4000
	Mast tilt (backward α /forward β)	deg	6/12	5/10	5/10	5/10	5/10	5/10	5/10	5/10
Fork	Fork dimensions	mm	1200×180×70	1200×200×100	1800×200×100	2400×200×100	2400×200×100	2400×250×105	2400×250×110	2400×250×110
	Shift distance	mm	434~1996	700~2310	700~2310	700~2310	700~2310	786~2776	786~2776	786~2776
	Application	-	20' ISO Containers Medium-tonnage cargo	20' ISO Containers/ Large-tonnage cargo			20' ISO Containers/ Large-tonnage cargo			

TECHNICAL PARAMETER

Qualification		Unit	SCP300C Series	SCP320C Series	SCP350C Series	SCP380C Series	SCP420C Series	SCP4604 Series
Performance parameters	Rated capacity	t	30	32	35	38	42	46
	Overall weight	kg	42500	43000	45000	47000	54000	56000
	Max. lift speed (Load/No load)	mm/s	300/350	300/350	300/350	250/300	250/300	250/300
	Max. lowering speed (Load/No load)	mm/s	400/350	400/350	400/350	400/350	400/350	400/350
	Max. travel speed (Load/No load)	km/h	26/28	26/28	26/28	22/25	22/25	22/25
	Gradeability (Load/No load)	%	18/33	17/33	16/30	22/40	21/38	20/35
	Cab noise	dB	74	74	74	74	74	74
Main parameters	Overall length L	mm	9190	9505	9505	10400	10400	10400
	Overall width W	mm	3520	3520	3520	4300	4300	4300
	Overall height H	mm	4360	4360	4360	4500	4500	5000
	Load center L1	mm	1200	1200	1200	1200	1200	1200
	Wheel base L2	mm	4500	4800	4800	5000	5500	5500
	Overhang front L3	mm	1185	1185	1185	1310	1310	1310
	Overhang rear L4	mm	1105	1105	1105	1100	1100	1100
	Min. ground clearance H2	mm	300	300	300	485	485	485
	Truck height over seat height H4	mm	2155	2155	2155	2360	2360	2360
	Inner turning radius R1	mm	715	715	715	1110	1110	1110
	outer turning radius R2	mm	6600	6800	6800	7600	7600	7600
	Front track width W1	mm	2472	2472	2472	3033	3033	3033
	rear track width W2	mm	2455	2455	2455	2740	2740	2740
Mast	Mast height (retracted H / extended H1)	mm	4400/6345	4400/6345	4400/6345	4500/6430	4500/6430	5000/7430
	Max. lift height H3	mm	4000	4000	4000	4000	4000	5000
	Mast tilt (backward α /forward β)	deg	5/10	5/10	5/10	5/10	5/10	5/10
Fork	Fork dimensions	mm	2400×300×110	2400×300×125	2400×300×125	2400×300×140	2400×300×140	2400×300×140
	Shift distance	mm	920~2850	920~2850	920~2850	1550~3150	1550~3150	1550~3150
	Application	-	20' ISO Containers Large-tonnage cargo	Large-tonnage cargo		Large-tonnage cargo		

MAST OPTIONS

Mast type	Max. hoisting height (H)	Sloping angle (Front/ Rear)	Mast model	Mast height		Free lift height	Mast model	Mast height		Free lift height	Mast model	Mast height		Free lift height	Mast model	Mast height		Free lift height
				Min.height	Max.height			Min.height	Max.height			Min.height	Max.height			Min.height	Max.height	
			SCP160				SCP180~200				SCP220~250				SCP280~300			
Standard mast	3000	5°/10°	MCPMS1630	3260	4710	—	MCPMS2030	3350	4800	—	MCPMS2530	3460	4905	—	—	—	—	—
	3500		MCPMS1635	3510	5210		MCPMS2035	3600	5300		MCPMS2535	3710	5405		—	—	—	
	4000		MCPMS1640	3760	5710		MCPMS2040	3850	5800		MCPMS2540	3960	5905		MCPMS3040	4360	6305	
	4500		MCPMS1645	4010	6210		MCPMS2045	4100	6300		MCPMS2545	4210	6405		MCPMS3045	4610	6805	
	5000		MCPMS1650	4260	6710		MCPMS2050	4350	6800		MCPMS2550	4460	6905		MCPMS3050	4860	7305	
	5500		MCPMS1655	4510	7210		MCPMS2055	4600	7300		MCPMS2555	4710	7405		MCPMS3055	5110	7805	
	6000		MCPMS1660	4760	7710		MCPMS2060	4850	7800		MCPMS2560	4960	7905		MCPMS3060	5360	8305	
	6500		MCPMS1665	5010	8210		MCPMS2065	5100	8300		MCPMS2565	5210	8405		MCPMS3065	5610	8805	
	7000		MCPMS1670	5260	8710		MCPMS2070	5350	8800		MCPMS2570	5460	8905		MCPMS3070	5860	9305	
Duplex full free lift mast	3000	5°/10°	MCPMD1630	3260	4710	1500	MCPMD2030	3350	4800	1500	MCPMD2530	3460	4910	1550	—	—	—	—
	3500		MCPMD1635	3510	5210	1750	MCPMD2035	3600	5300	1750	MCPMD2535	3710	5410	1800	—	—	—	—
	4000		MCPMD1640	3760	5710	2050	MCPMD2040	3850	5800	2000	MCPMD2540	3960	5910	2050	MCPMD3040	4360	6305	2000
	4500		MCPMD1645	4010	6210	2250	MCPMD2045	4100	6300	2250	MCPMD2545	4210	6410	2300	MCPMD3045	4610	6805	2250
	5000		MCPMD1650	4260	6710	2500	MCPMD2050	4350	6800	2500	MCPMD2550	4460	6910	2550	MCPMD3050	4860	7305	2500
	5500		MCPMD1655	4510	7210	2750	MCPMD2055	4600	7300	2750	MCPMD2555	4710	7410	2800	MCPMD3055	5110	7805	2750
	6000		MCPMD1660	4760	7710	3000	MCPMD2060	4850	7800	3000	MCPMD2560	4960	7910	3050	MCPMD3060	5360	8305	3000
	6500		MCPMD1665	5010	8210	3250	MCPMD2065	5100	8300	3250	MCPMD2565	5210	8410	3300	MCPMD3065	5610	8805	3250
	7000		MCPMD1670	5260	8710	3500	MCPMD2070	5350	8800	3500	MCPMD2570	5460	8910	3550	MCPMD3070	5860	9305	3500
Triplex full free lift mast	4500	5°/10°	MCPMT1645	3250	6130	1500	MCPMT2045	3300	6180	1500	MCPMT2545	3300	6180	1500	MCPMT3045	3700	6580	1500
	5000		MCPMT1650	3500	6630	1667	MCPMT2050	3467	6680	1667	MCPMT2550	3467	6680	1667	MCPMT3050	3867	7080	1667
	5500		MCPMT1655	3750	7130	1833	MCPMT2055	3633	7180	1833	MCPMT2555	3633	7180	1833	MCPMT3055	4033	7580	1833
	6000		MCPMT1660	4000	7630	2000	MCPMT2060	3800	7680	2000	MCPMT2560	4030	7930	2000	MCPMT3060	4200	8080	2000
	6500		MCPMT1665	4250	8130	2167	MCPMT2065	3967	8180	2167	MCPMT2565	3967	8180	2167	MCPMT3065	4367	8580	2167
	7000		MCPMT1670	4500	8630	2333	MCPMT2070	4133	8680	2333	MCPMT2570	4133	8680	2333	MCPMT3070	4533	9080	2333

MAST OPTIONS

Mast type	Max. hoisting height (H)	Sloping angle (Front/ Rear)	Mast model	Mast height		Free lift height	Mast model	Mast height		Free lift height	Mast model	Mast height		Free lift height
				Min.height	Max.height			Min.height	Max.height			Min.height	Max.height	
			SCP320~350						SCP380~400				SCP420~460	
Standard mast	3000	5°/10°	—	—	—	—	—	—	—	—	—	—	—	—
	3500		—	—	—		—	—	—		—			
	4000		MCPMS3540	4360	6305		MCPMS4040	4500	6430		MCPMS4640	4500	6430	
	4500		MCPMS3545	4610	6805		MCPMS4045	4750	6930		MCPMS4645	4750	6930	
	5000		MCPMS3550	4860	7305		MCPMS4050	5000	7430		MCPMS4650	5000	7430	
	5500		MCPMS3555	5110	7805		MCPMS4055	5250	7930		MCPMS4655	5250	7930	
	6000		MCPMS3560	5360	8305		MCPMS4060	5500	8430		MCPMS4660	5500	8430	
	6500		MCPMS3565	5610	8805		MCPMS4065	5750	8930		MCPMS4665	5750	8930	
	7000		MCPMS3570	5860	9305		MCPMS4070	6000	9430		MCPMS4670	6000	9430	
Duplex full free lift mast	3000	5°/10°	—	—	—	—	—	—	—	—	—	—	—	—
	3500		—	—	—	—	—	—	—	—	—	—	—	
	4000		MCPMD3540	4360	6305	2000	MCPMD4040	4500	6430	2000	MCPMD4640	4500	6430	2000
	4500		MCPMD3545	4610	6805	2250	MCPMD4045	4750	6930	2250	MCPMD4645	4750	6930	2250
	5000		MCPMD3550	4860	7305	2500	MCPMD4050	5000	7430	2500	MCPMD4650	5000	7430	2500
	5500		MCPMD3555	5110	7805	2750	MCPMD4055	5250	7930	2750	MCPMD4655	5250	7930	2750
	6000		MCPMD3560	5360	8305	3000	MCPMD4060	5500	8430	3000	MCPMD4660	5500	8430	3000
	6500		MCPMD3565	5610	8805	3250	MCPMD4065	5750	8930	3250	MCPMD4665	5750	8930	3250
	7000		MCPMD3570	5860	9305	3500	MCPMD4070	6000	9430	3500	MCPMD4670	6000	9430	3500
Triplex full free lift mast	4500	5°/10°	MCPMT3545	3700	6580	1500	MCPMT4045	3800	6680	1500	MCPMT4645	3800	6680	1500
	5000		MCPMT3550	3867	7080	1667	MCPMT4050	3967	7180	1667	MCPMT4650	3967	7180	1667
	5500		MCPMT3555	4033	7580	1833	MCPMT4055	4133	7680	1833	MCPMT4655	4133	7680	1833
	6000		MCPMT3560	4200	8080	2000	MCPMT4060	4300	8180	2000	MCPMT4660	4300	8180	2000
	6500		MCPMT3565	4367	8580	2167	MCPMT4065	4467	8680	2167	MCPMT4665	4467	8680	2167
	7000		MCPMT3570	4533	9080	2333	MCPMT4070	4633	9180	2333	MCPMT4670	4633	9180	2333

Standard mast

- Meet ordinary work condition requirement
- With mast lifting buffer position limitation protection technology
- Mast chain monitoring protection technology



Duplex full free lift mast

- Suitable for narrow place like ship cabin
- Good view with free lift range exceeding 2000mm



Triplex full free lift mast

- Separate lift for low position cargo; equipment height is lowered by 20%; mast center of gravity lowered by 10%; safer operation.



ATTACHMENT OPTIONS

	Fork Rated capacity: 10t/ 16t/ 18t/ 20t/ 22t/ 25t/ 30t/ 32t/ 35t/ 38t/ 42t/ 46t Application: Large-tonnage cargo or bulk cargo Main frame color: Engineering black
	Clamp Rated capacity: 10t/ 16t/ 18t/ 20t/ 22t/ 25t/ 30t/ 32t/ 35t/ 38t/ 42t/ 46t Application: Wood Main frame color: Engineering black
	Coil ram Rated capacity: 10t/ 16t/ 18t/ 20t/ 22t/ 25t/ 30t/ 32t/ 35t/ 38t/ 42t/ 46t Application: Curly cargo such as steel coil, steel wire coil, etc Main frame color: Engineering black
	Container Spreader Rated capacity: 9t Application: ISO 20'/40' Containers Main frame color: Engineering black
	Truck frame handler Rated capacity: 4.5t Application: Chassis Main frame color: Engineering black
	PC prefabrication unit attachment Rated capacity: 16t Application: PC prefabrication unit Main frame color: Engineering black

ADD-ON OPTIONS

FUNCTION	BRAND	CODE	NOTE
Electric heating system for hydraulic oil	SANY	13528757	A essential component in environment of -5° in North America, Russia and Europe or -15° in cold areas of China. Use electric appliances to heat the hydraulic oil, making its temperature within reasonable range.
Hydraulic protection system in cold areas	SANY	13519058	A essential component in environment of -5° to -15° in China's cold areas. Heat the hydraulic oil by heating the gear pump to make the temperature within reasonable range.
Engine pre-heating system	SANY	11145235	A essential component in areas where temperature is below -15°. Heat the coolant before starting the engine to quickly warm the equipment.
Cab assistant seat	SANY	13027232	Cab assistant seat
Engine timer (by hour)	SANY	11446498	Timer for the engine's working hours
Amplifying alarm system	SANY	11447670	Including the amplifier and the alarm
Heavy-duty Forklift Truck LED lamp	SANY	13526507	Including: headlamp, rear lamp, mast working indicating lamp, tail lamp, steering lamp, alarm lamp and cab top working lamp; all are LED lamp.
Rear counterweight alarm lamp	SANY	11447452	One alarm lamp for the rear counterweight
Cab reading lamp	SANY	11447665	Hella fluorescent lamp, installed on the top of the cab.
12V power supply	SANY	11446544	Provide 12V power interface (on the top of the electric control cabinet in the cab)
24V power supply	SANY	11447574	Provide 24V power interface (on the top of the electric control cabinet in the cab)
3m range reversing radar system	SANY	13515506	Visible reversing radar with 3m range sensor
Mast video monitoring system	SANY	13520946	Camera system (9" screen + 2 cameras), used to improve the front view visibility
Safety belt	SANY	60230840	Emergency lock three-point safety belt
Walkie talkie device	SANY	11994939	Install walkie talkie
Sensor	SANY	11995265	Sensor installing support
RPIS installing support	SANY	12719277	Install RPIS
GPS system	SANY	A810299000751	GPS system
Rollover protection system	SANY	12889986	Install linear and angle sensor to prevent rollover
Radio	SANY	60006478	Including radio, horn and antenna.
Fork and knife mobile valve	SANY	13254790	Realize single action, translation and relative motion of the prongs.

CONSTRUCTION CASES

2015,Mexico



2013,Port of Tianjin



2014,Philippine



2015,Taicang Port, Jiangsu



2012,Shanghai



2014, USA



2012, Port of Singapore



2014, Guatemala



2012, Dammam, Saudi Arabia



SERVICE



Quality Changes the World Service Creates value



After-sales Service Hotline:

4008 87 8318

Consultation/Complaints Hotline:

4008 87 9318



Service Concept

All for customers, creating value for customers.

Service Strategy

Build unparalleled service; realize "First Brand of Global Service" of Port Machinery.

Service Commitment

- 1** Contact the customer within 15 minutes after receiving service messages and immediately go to the site or call the customer to explain handling measures.
- 2** Time from receiving the service message to arrival at the trouble site: less than 2 hours to the main service areas.
- 3** 24 hours stand-by.
- 4** Solve general failure and provide common parts within 24 hours.

Service Advantages

SANY has offices in over 200 countries and regions, with 30 agents in China, about 50 repair factories and 6S stores, over 3000 elite service engineers, 1000 offices and parts warehouse accommodating 100,000 kinds of parts worth more than RMB 600 million. We also have highly efficient logistics system by air, sea and land, which can transport genuine parts at any time.

Industry leading Enterprise Control Center (ECC): running for more than ten years, the ECC, as the industry initiative, is worth over RMB 30 million. It can realize real-time supervision and remote precision troubleshooting. With information promoting industrialization, it innovatively created SANY's service system of "Unity of man and heaven, synergy among 1st, 2nd and 3rd levels".

GCP, GPS and CSM system: customers can learn the working conditions & key work parameters through SANY's global portal and realize remote supervision. The system also supports parts and service search, providing convenient all-round equipment supervision.

